



MULTIPURPOSE LEAK DETECTORS
ASM GRAPH / ASM 142 SERIES



The ASM Graph / ASM 142 series sets a new performance standard for an entry-level unit

General purpose leak detectors have always been synonymous with limited performance units. This belief was based on limited vacuum and electronic technologies available then to meet the key requirements of size and cost. Alcatel has once again revolutionized the world of leak detection, proving its prowess in helium leak detection. The new universal leak detector model is the end result of an innovative engineering approach using the latest electronic technologies and vacuum concepts.

This rugged unit is undeniable proof that multipurpose no longer means compromise. On the contrary, the ASM Graph / ASM 142 series delivers unmatched features for an entry-level unit such as, a roughing capacity of 10 m³/h (7 cfm) with a usable helium sensitivity in the 10⁻¹¹ atm.cc/s range. In addition, its comprehensive bulletproof display panel loaded with advanced features available at your fingertips delivers a true user-friendly unit.

- The ASM 142 S, a dedicated sniffing unit, based on the same well-proven leak testing concept, is also available for outboard leak testing applications.
- The ASM Graph D / ASM 142 D is the most simple solution that you can find if you are attracted to « dry » helium leak detection.
- Dedicated to semi-conductor application the ASM Graph D+ offers you a compact and powerful unit into a clever package.



SIMPLICITY



RUGGEDNESS



VERSATILITY



The simplest solutions for all applications


These universal leak detectors can comply with a virtually limitless list of applications.

Its remarkable versatility based on a smart design, allows many creative possibilities:

Maintenance applications and quality control of vacuum systems

- High helium pumping speed at the inlet port will deliver fast response time.
- A simple operator interface including a vocal synthesizer will provide a unique tool that will ease the operator tasks.
- A convenient transport cart will allow fast mobility while in operation.

Applications - semi conductor
- research and development
- cryogenic
- aerospace industry
- industries which use vacuum process

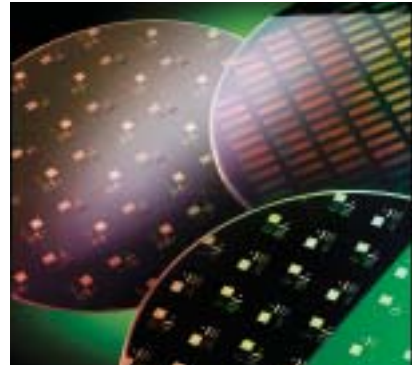

Production or quality control of components

- High roughing capacity will deliver fast cycle time.
- Advanced electronics will provide full automation of the test cycle.
- Integrated software will control and manage the operation with an auxiliary pump.
- Comprehensive interface capabilities such as discrete I/O and RS 232 will ease its interface with a P.L.C or/and a P.C.


Applications - mechanical industry (seals, valves, various small pieces)
- instrumentation (sensors)



Outboard testing of pressurized parts (sniffing test mode)

- A unique "floating" background suppression device will deliver and guarantee a sensitivity in the 10^{-7} atm.cc/s range.
- The 142's ruggedness will allow its usage in very harsh industrial environments.

Applications - refrigeration
- air-conditioning

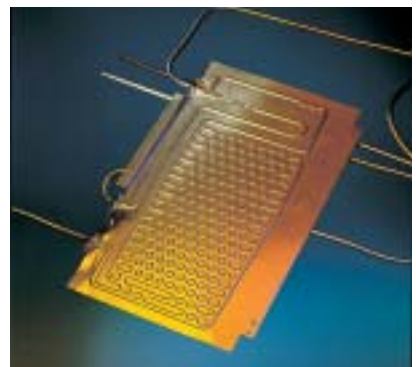


ASM Graph series : leak testing has never been easier

The ASM Graph series provides an unique operator interface with a touch screen including color graphic display, graphs and dynamic vacuum diagram.

The touch screen allows easy entry of your application parameters settings.

The two modes of operation, basic and advanced were specifically designed to meet any leak detection needs. Helium leak rate trend and behavior, inlet pressure change over time (for large leak detection), color graphs and full automation are

among many features conveniently and easily accesible to the operator. Additionally, an interactive dynamic vacuum diagram indicates the status of the leak detector internal vacuum components.

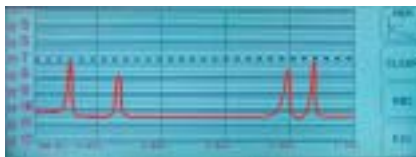

Measurement function



Graph parameters selection



Parameters settings



Dynamic vacuum diagram



Example of downloaded graph...



...related data (excel compatible)

Up to 900 hours of downloading capability, including graphs and data.

SIMPLICITY



SIMPLICITY

The simple design of this unit results in a quick learning curve for a new user.

It takes no more than a few minutes to get familiar with its operation.

In addition, the ASM Graph / ASM 142 series also offers evolved features to assist the operator in his daily test operation:

- Auto-calibration with temperature compensation
- Auto-Zero function
- Helium Signal Direct Readout function
- Full automation of the test cycle.

RUGGEDNESS



RUGGEDNESS

The ASM 142 series utilizes well proven mechanical vacuum pump technology designed specifically for heavy usage in very harsh industrial environments. The helium stability of the rotary vane pump guarantees excellent stability of the helium signal.

The low rotational speed of the M.D.P. (Molecular Drag Pump) at 27,000 rpm makes this unit totally bullet proof against accidental air inrushes. Further, it allows the leak detector to be moved while in operation.

The high compression ratio of the M.D.P. facilitates the gross leak test at a high pressure (7.5 Torr / 10 mbar) which speeds up the leak test process of outgassing parts.

The ASM Graph / ASM 142 series requires little maintenance and its internal layout allows easy access to all the components.

In addition, the rotary vane pump is equipped with a practical oil change device to speed-up the process.

VERSATILITY



VERSATILITY

With its 10 m³/h roughing pump capacity, the ASM 142 leak detector (standard version) delivers performance to address any leak detection application. Its unparalleled versatility makes it a truly universal unit, able to perform effectively both inboard and outboard leak tests.

In addition to these superior features, this unit offers a complete set of options and accessories to meet the requirements of any applications (refer to the following pages for more information).



Since its introduction in 1999, the ASM 142 has become the most popular universal helium leak detector on the market. A combination of performance (the highest roughing capacity of its category), flexibility (multi-standard unit), and ruggedness (can work in any harsh environments), the ASM 142 is the answer to majority of leak detection applications. Small productions or maintenance, this unit excels and fears no competition.

The ASM Graph/ASM 142 series sets a new standard...



ASM Graph



ASM 142



ASM Graph D



ASM 142 D



ASM Graph D+

... in the leak detection arena.



ASM 142 S

Based on the same platform, the ASM 142 D (dry leak detector) and the ASM 142 S (dedicated sniffer unit) were released on the market a year after the ASM 142. They both benefit from the same advanced technology. The new ASM Graph series brings the 142 series to a new level of excellence.

The perfect combination of performance...


The design of the ASM Graph / ASM 142 series includes Adixen's newest analyzer cell, innovative operator interface, well proven helium stable rotary vane pump and high compression, low rotational speed (27,000 rpm) molecular drag pump.

New Analyzer cell:

- 180° magnetic deflection mass spectrometer.
- Patented amplification system based on an electron multiplier (multi channel plate concept) which provides unmatched stability and sensitivity.
- Two independent filaments for a better reliability and maintainability (automatic switch from one filament to the other with automatic auto-calibration for maximum up time).

Front Panel Display:

- 4 levels of operation menus for enhanced user friendliness.
- Comprehensive display panel with sensing switches for smoother operation.
- Voice synthesizer for additional operator interface ability.

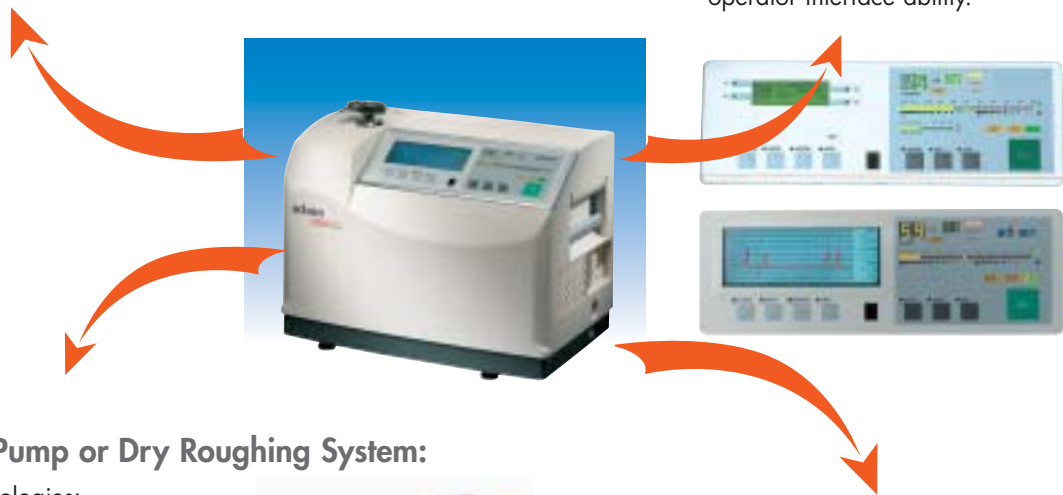

Rotary Vane Pump or Dry Roughing System:

Well proven technologies:

2-stage helium stable rotary vane pump:

- 10 m³/h (7 cfm) roughing capacity in the standard version for fast test cycle (ASM Graph / ASM 142)
- 5 m³/h (3.2 cfm) for the sniffing version (ASM 142 S)
- Large capacity mist eliminator.



Dry Roughing System:

The design of the ASM Graph D / ASM 142 D uses all our cumulated experience in the compact dry pumping systems:

- Diaphragm pump + molecular drag pump which develops an air pumping speed from 1 up to 18 m³/h (0,6 up to 10,5 cfm).
- ASM Graph D+ : the ACP 15 multistage roots frictionless pump technology guarantees a high level of cleanliness, reliability and longevity.



Electronic Interface:

Comprehensive interface to connect easily to a P.L.C and/or to a P.C.

- Discrete I/O interface
- Complete RS 232 interface.

ASM Graph / ASM 142 series

The modules of the ASM 142 series are based on the same well proven leak testing concept. They share the same basic components:

- high sensitivity analyzer cell with dual filaments,
- improved molecular drag pump model AMP007,
- latest generation of electronics,
- plastic cover and metal frame.

ASM Graph / ASM 142, Standard version

The ASM 142 is a truly multipurpose unit that complies with a virtually limitless list of applications. It offers inboard and outboard leak testing capabilities, with unmatched features such as a 10 m³/h (7 cfm) roughing capacity for fast cycle time.

The ASM 142 is the perfect answer to all the users who need to perform various types of leak tests, including a vacuum test.



ASM 142 S, Dedicated sniffing unit

The ASM 142 S delivers a perfect combination of performance with unique features.

- Equipped with a helium-stable 2005 rotary vane pump with an optimized internal vacuum block.
- Integrates a comprehensive operator interface, ideally designed for sniffing leak testing.

- 5 m sniffer probe.
- Auto-calibration performed in sniffing mode with temperature and age compensation for high accuracy calibration.

The ASM 142 S is the perfect answer to all industrial outboard leak testing applications requirements.

ASM Graph D / ASM 142 D, The most simple solution in terms of dry helium leak detector

The latest in the famous ASM Graph / ASM 142 series, the ASM Graph D / 142 D is the most simple solution that you can find if you are attracted to the « dry » helium leak detection.

This 100 % hydrocarbon-free leak detector not only guarantees total cleanliness during the leak test, but also provides advantages like simplicity of maintenance.

The roughing pump package of the ASM Graph D / ASM 142 D operates up to 10,000 hours maintenance free and develops an air pumping speed from 1 to 18 m³/h (0,6 to 10,5 cfm) thanks to the association of a diaphragm pump and a molecular drag pump.



ASM Graph D+

Power and sensitivity in a small package

Compact and powerful helium leak detector, the ASM Graph D+ combines 14 m³/h clean, dry, roughing capacity with our high sensitivity analyzer cell in very small foot print clean room compatible package.

Highly manoeuvrable, the system is mounted on a unique cart equipped with four large, full swivel wheels with brakes for easy movement through and around cluttered areas and over gridded floors such as Semiconductor Fabs.

Compartments for convenient storage of vacuum hardware and provisions for a helium bottle, are part of this clever package, all in a foot print of just 0.5m x 0.35m (20" x 16").

ASM Graph D+



ACP15, 14 m³/h frictionless technology

ASM Graph D+ accessories

Description	PART NUMBER
Helium bottle holder Dia. 135/126 mm	112532
Helium bottle holder Dia. 177 mm	112533
Remote control holder	112534

Various types of options...

Interface board

It accommodates automation of the leak detector through a P.C or a P.L.C.

The interface board includes several types of interface:

- Analog signal (Helium signal)
- Discrete input/output (for remote control through a P.L.C)
- A complete RS 232 (for remote control through a supervision system).

Automatic test chambers

- Small model: hemispherical test chamber Ø 72 mm, depth 31 mm, with start of cycle contact.
- Medium model: cylindrical test chamber Ø 85 mm, depth 68 mm, with start of cycle contact.

This option integrates the interface board.

Metal seal

Allows using the leak detector in very high helium environment.

3 masses option

(ASM Graph / ASM 142, ASM Graph D / ASM 142 D only)

Hydrogen, helium 3, helium 4

... and accessories

Remote control

The ASM 142 series uses the same remote control than all the new generation Adixen leak detectors. It offers all the advanced features such as auto-calibration, auto-zero and zoom function.



Transport cart

This cart allows easy transportation of the leak detector. It also includes a compartment for accessories, maintenance kit and the instruction manual.



Measurements units

The multi-color remote control offers the choice from 3 different measurement units :

- mbar.l/s and mbar.
- Pa.m³/s and Pa.
- Torr.l/s and Torr.

Description	PART NUMBER
Remote control	: mbar.l/s : Pa.m ³ /s : Torr.l/s
Transport cart	106688 108880 108881
Kit RS 232	108068
Helium spray gun	107657
Helium spray gun "elite"	112535
Standard sniffer probe	109951
Dedicated sniffer probes	SNC1E1T1
	*

*For accessories, see "Accessories for helium leak detectors".

Technical specifications

Specifications → vacuum mode		ASM Graph/ASM 142	ASM Graph D/ASM 142 D	ASM 142 S	ASM Graph D+
Minimum detectable helium leak	5.10 ⁻¹² atm.cc/s	X	X		X
Maximum inlet test pressure	10 mbar (7.5 Torr)	X	X		X
Helium pumping speed at the inlet of the unit	1.3 l/s (78 l/min)	X	X		X
Roughing capacity	10 m ³ /h (6 cfm)	X			
	1 up to 18 m ³ /h (0,6 up to 10,5 cfm)		X		
	14 m ³ /h (8 cfm)				X

Specifications → sniffing mode		ASM Graph/ASM 142	ASM Graph D/ASM 142 D	ASM 142 S	ASM Graph D+
Minimum detectable helium leak	1.10 ⁻⁷ atm.cc/s	X	X	X	X
Response time	< 1 s	X	X	X	X

General specifications		ASM Graph/ASM 142	ASM Graph D/ASM 142 D	ASM 142 S	ASM Graph D+
Start-up time (including auto-calibration)	Less than 3 minutes	X	X	X	X
Power consumption		< 1 kw	< 500 w	< 500 w	< 1 kw

Integrated Functions		ASM Graph/ASM 142	ASM Graph D/ASM 142 D	ASM 142 S	ASM Graph D+
Auto-calibration, with built-in temperature compensated calibrated leak		X	X	X	X
Full automation of test cycle including:		X	X		X
- cycle sequence					
- memorization of the last test					
- test result display					
Helium background suppression with "floating zero" to keep the signal from going negative.		X	X	X	X
Automatic external calibration		X	X		X
Helium pollution prevention		X	X		X
Audio alarm with variable pitch (up to 90 dbA)		X	X	X	X
Vocal synthesizer		X	X	X	X

User defined parameters		ASM Graph/ASM 142	ASM Graph D/ASM 142 D	ASM 142 S	ASM Graph D+
4 user languages		X	X	X	X
3 pressure and Helium flow units		X	X	X	X
Weight		56 kg	42 kg	56 kg	70 kg
		123 lb	92 lb	123 lb	154 lb



Ordering information ASM Graph - ASM Graph D

0 0 0 0

Detector		
	ASM Graph	ASM Graph D
Code	G	H

Masses		
	Helium	3 masses
Code	0	3

3 Masses (3). This option allows the leak detector to detect masses 2, 3 and 4.

Seals for the vacuum module and analyzer cell		
	Elastomer	Metal
Code	R	L

The leak detector can be provided with : Elastomer seals (for the high vacuum as well as the inlet bloc) as standard (R) or with metal seals for specific applications (L).
* metal seal not available for the ASM 142 D
The elastomer seal is the standard configuration.

Interface board + test chamber				
	Without interface board	With interface board	Test chamber Small model	Test chamber Medium model
Code	0	1	2	3

The automatic test chambers integrate the interface board.

Language				
	French	English	German	Japanese
Code	A	B	C	E

Main power supply		
	110/130 V - 50/60 Hz	220/240 V - 50/60 Hz
Code	7	8

Main power plug						
	USA/Japan	France/Germany	U.K.	Italy	Switzerland	Without plug
Code	1	2	3	4	5	7

For example
You need ...

- ASM Graph **G**
- 3 masses **3**
- Elastomers seal **R**
- Without interface board **0**
- English **B**
- 220/240 V 50/60 Hz **8**
- Germany **2**

= **G 3 R 0 0 0 0 0 B 8 2 0**

Ordering information ASM 142 - ASM 142 D

0 0 0 0

Leak detector		
	ASM 142	ASM 142 D
Code	T	W

Masses		
	Helium	3 Masses
Code	0	3

3 Masses (3). This option allows the leak detector to detect masses 2, 3 and 4.

Seals for the vacuum module and analyzed cell		
	Elastomer	Metal *
Code	R	L

The leak detector can be provided with :
Elastomer seals (for the high vacuum as well as the inlet bloc) as standard (R) or with metal seals for specific applications (L).
* metal seal not available for the ASM 142 D
The elastomer seal is the standard configuration.

Interface board + test chamber				
	Without	Interface board only	Auto. test chamber small model	Auto. test chamber medium model
Code	0	1	2	3

The automatic test chambers integrate the interface board.

Language				
	French	English	German	Japanese
Code	A	B	C	E

Main power supply		
	100/130 V - 50/60 Hz	220/240 V - 50/60 Hz
Code	7	8

Main power cable type						
	U.S.A.	France/Germany	U.K.	Italy	Switzerland	Without plug
Code	1	2	3	4	5	7

For example
You need ...

- ASM 142 **T**
- 3 masses **3**
- Elastomers seal **R**
- With interface board **1**
- French **A**
- 220/240 V **8**
- 50/60 Hz **8**
- France **2**

= **T 3 R 0 0 0 0 1 A 8 2 0**

Ordering information ASM Graph D+

N 0 0 0 0

	Detector	
	ASM Graph D+	
Code	N	

	Masses	
	Helium	3 masses
Code	0	3

3 Masses (3). This option allows the leak detector to detect masses 2, 3 and 4.

	Seals for the vacuum module and analyzer cell	
	Elastomer	Metal
Code	R	L

The leak detector can be provided with : Elastomer seals (for the high vacuum as well as the inlet bloc) as standard (R) or with metal seals for specific applications (L). * metal seal not available for the ASM 142 D The elastomer seal is the standard configuration.

	Interface board	
	Without interface board	With interface board
Code	0	1

The automatic test chambers integrate the interface board.

	Language			
	French	English	German	Japanese
Code	1	2	3	4

	Main power supply	
	110/130 V - 50/60 Hz	220/240 V - 50/60 Hz
Code	7	8

	Main power plug					
	USA/Japan	France/Germany	U.K.	Italy	Switzerland	Without plug
Code	1	2	3	4	5	7

For example
You need ...

ASM Graph D+ N
3 masses 3
Elastomers seal R
Without interface board 0
French A
220/240 V
50/60 Hz 8
U.K. 3

= N 3 R 0 0 0 C 0 A 8 3 0

Ordering information ASM 142 S

U 0 R 0 0 0 0 C [] [] [] [] 0

	Leak detector
	ASM 142 S
Code	U

	Interface board	
	With	Without
Code	1	0

	Language			
	French	English	German	Spanish
Code	A	B	C	F

	Main power supply	
	100/130 V - 50/60 Hz	220/240 V - 50/60 Hz
Code	7	8

	Main power cable type					
	U.S.A.	France/Germany	U.K.	Italy	Switzerland	Without plug
Code	1	2	3	4	5	7

Standard sniffer probe (wire 5 m long / nozzle 9 cm - SNC1E1T1) is provided with the ASM 142 S sniffer unit.

For example
You need ...

ASM 142 S	U
Without interface board	0
English	B
220/240 V 50/60 Hz	8
U.K.	3

= U 0 R 0 0 0 0 C 0 B 8 3 0

